


TYPICAL STEEL DETAILS


1. A typical reinforcement for a cantilever retaining wall is shown below.

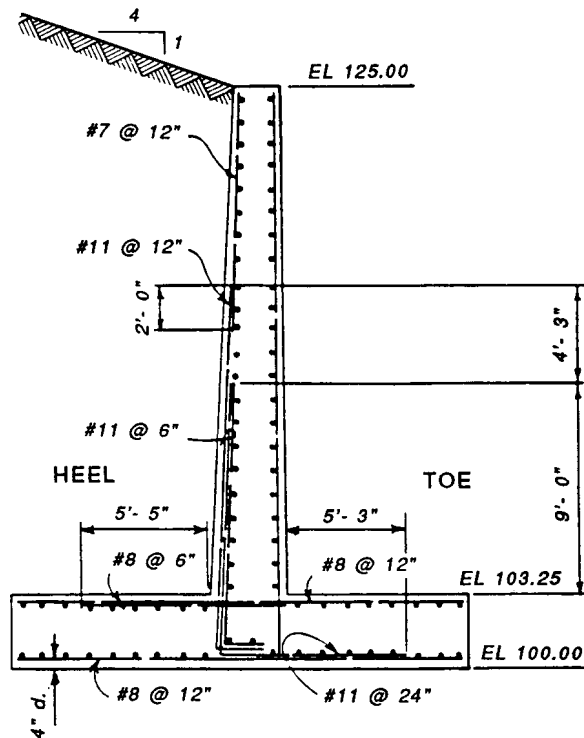

- NOTES: 1. ALL REINF. TO BE #6 @ 12" EXCEPT AS SHOWN.  
2. ALL HOOKS SHOWN ARE ACI STANDARD HOOKS.  
3. MINIMUM CLEAR CONCRETE COVER TO BE 3" EXCEPT AS SHOWN.

ETL 1110-2-322  
15 Oct 90

2. A typical reinforcement for a floodwall is shown below.

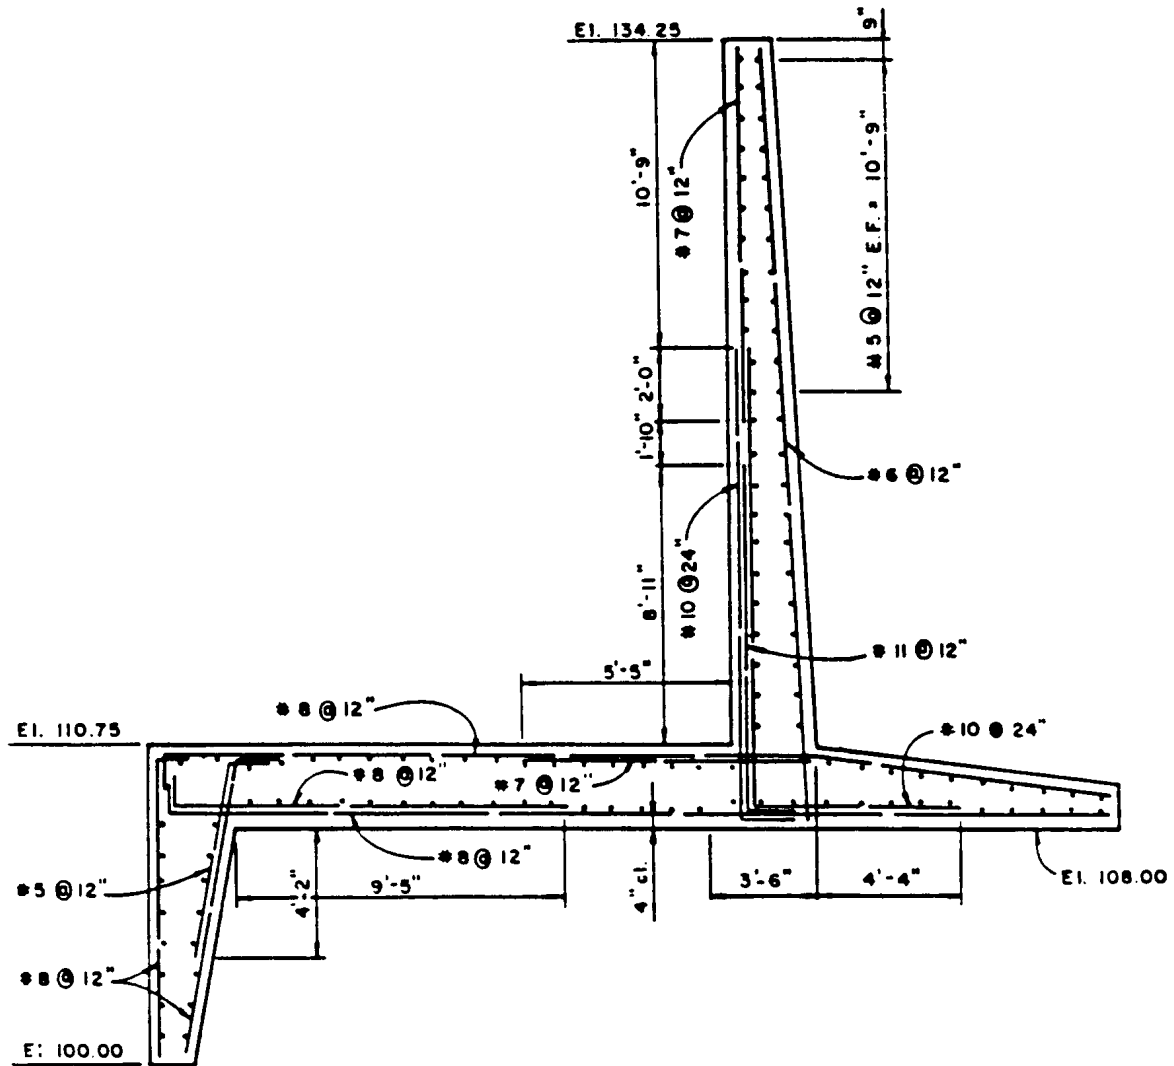

**NOTES:**

1. All longitudinal reinforcement to be #6 @ 12" E.F. except as noted.
2. Concrete cover for reinforcement to be 3 inches except as noted.
3. All hooks shown to be ACI standard hooks.